

# MR 55

## AM-FM MONAURAL TUNER

# McIntosh

## The Compendium



**FRONT PANEL:** Anodized gold and black aluminum panel. Illuminated dial. FM light. AM light. Tuning indicator: - to +. Signal strength indicator: 0 to 5. MC light. KC light. Tuning control. ⚡ AFC control: MIN to MAX. AM SENSITIVITY switch: greatest, intermediate or minimum. VOLUME control with on-OFF switch. SELECTOR switch: FM LISTEN, FM TUNE, AM BROAD, AM MEDIUM, AM SHARP or PHONO.



**BACK PANEL:** Screw terminals for TO TV SET, FM 300  $\Omega$  ANTENNA, and AM ANTENNA: HI, LO and GND. ⚡ Power cord. FUSE. SWITCHED AC outlet. PANEL LAMPS switch: HIGH or LOW. AM ANTENNA switch: LOOP or ANT. PHONO INPUT. 2 audio OUTPUTS. MULTIPLEX OUTPUT.

**TUBES:** 2-6BZ7, 6AB4, 2-6BJ6, 3-6AU6, 4-6AL5, 6BN6, 6BV8, 6BA6, 6BE6, 2-12AU7.

**FM SECTION:** **Sensitivity:** 3uV. **Response:** 20-20kHz (+3 -3dB). **Distortion:** less than 3%. **Capture Ratio:** 1 to 0.8. Four IF stages. Two limiters.

**AM SECTION:** **Sensitivity:** 1.5uV. **Selectivity bandwidth:** 20-10kHz, 20-6.5kHz, and 20-2kHz. **Whistle Filter:** 70dB reject at 10kHz.

**Power Requirements:** 171~125V at ?? Watts.

**CABINET:** L 55




# MR 55

AM-FM MONAURAL TUNER

# McIntosh

The Compendium

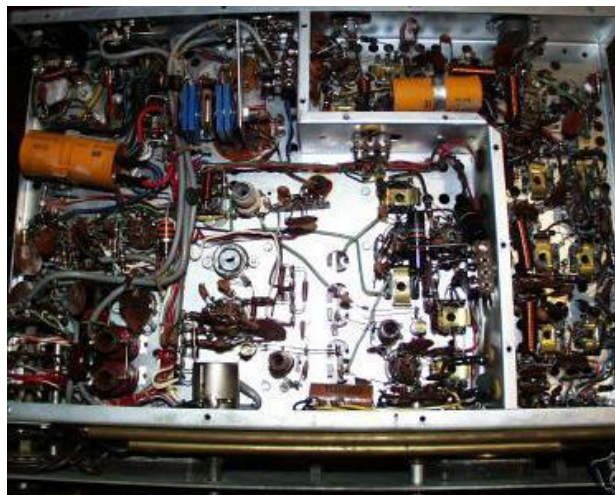

**MR 55** - Sold from December 1957 - 1959. S/N: 1K001~2K710 (1,708 UNITS)

**Size:** 4-3/4"H, 14-3/4"W and 12"D. **Weight:** 17 lbs, 3 oz. **\$249.00**