

MC 2205

STEREO POWER AMPLIFIER

McIntosh
The Compendium



FRONT PANEL: Glass with illuminated teal/gold nomenclature. Illuminated left and right power level meters (linear WATTS or DECIBELS). METER function lamps: WATTS, HOLD or DECIBELS. OUTPUT MODE lamps: NORMAL or LIMIT. ⚡ LEFT GAIN control. METER RANGE SWITCH: -20, -10, 0, WATTS and HOLD. HEADPHONES jack. SPEAKERS switch: OFF or ON. RIGHT/MONO GAIN control. POWER switch: OFF or ON. PANLOC buttons.



BACK PANEL: LEFT and RIGHT speaker OUTPUT barrier strips. Power cord. AC OUTLET. FUSE. POWER GUARD switch: NORMAL or OUT. MODE switch: STEREO or MONO. Left and Right(MONO) audio INPUT. INPUT LEVEL switch: 2.5v or .75v. Panloc mounting.

SPECIFICATIONS: 200w/ch. (400w mono). **Response:** 20-20kHz (+0 -0.25dB). **Distortion:** 0.1%. **Noise and Hum:** -95dB. **Output Impedance:** 1, 2, 4 and 8 ohms. (0.5, 1, 2, and 4 ohms in mono). **Damping Factor:** 16 or greater. **Input Impedance:** 100k. **Input Sensitivity:** 0.75v or 2.5v. **Headphone Impedance:** low. Sentry Monitor. Power Guard. **Autoformers.**


CABINET: L 14 Also fits L 21 and L54

PANLOC BRACKETS: Right - 043-678 / Left - 043-679

MC 2205

STEREO POWER AMPLIFIER

McIntosh
The Compendium

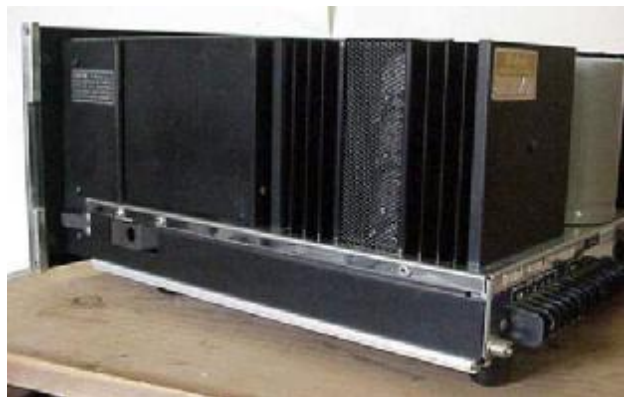

MC 2205 - Sold from December 1975 - 1981. S/N: AX1001~AX9999 & CH1001~CH4299 (12,296 UNITS)

Size: 7-1/8"H, 16-3/16"W and 14-1/2"D. **Weight:** 85 lb. **\$1,649.00**