

MC 2500

STEREO POWER AMPLIFIER

McIntosh
The Compendium



FRONT PANEL: Gold and black anodized aluminum panel or black anodized aluminum panel. Illuminated left and right power level meters (linear WATTS or DECIBELS). LEFT and RIGHT POWER GUARD lamps: LIMIT or NORMAL. ⚡ LEFT GAIN control. METER RANGE SWITCH: -20, -10, 0, WATTS and HOLD. SPEAKERS switch: OFF or ON. RIGHT/MONO GAIN control. HEADPHONES jack. POWER switch: ON or OFF. Handles.



BACK PANEL: Dual cooling fans. ⚡ Power cord receptacle. FANS switch: thermally switched LO, HI or CONTINUOUS HI. LEFT and RIGHT speaker OUTPUT barrier strips. MODE switch: STEREO, MONO BRIDGE or MONO PARALLEL. Left and Right (MONO) audio INPUT. INPUT LEVEL switch: 2.5v or .75v.


SPECIFICATIONS: 500w/ch. (1000w mono). **Response:** 20-20kHz (+0 -0.25dB). **Distortion:** 0.02%. **Noise and Hum:** -95dB. **Output Impedance:** 1, 2, 4, and 8 ohms. (0.5, 1, 2, 4, 8 and 16 ohms in mono). **Damping Factor:** 30 or greater. **Input Impedance:** 50k. **Input Sensitivity:** 0.75v or 2.5v. Sentry Monitor. Power Guard. Autoformers.



MC 2500

STEREO POWER AMPLIFIER

McIntosh
The Compendium

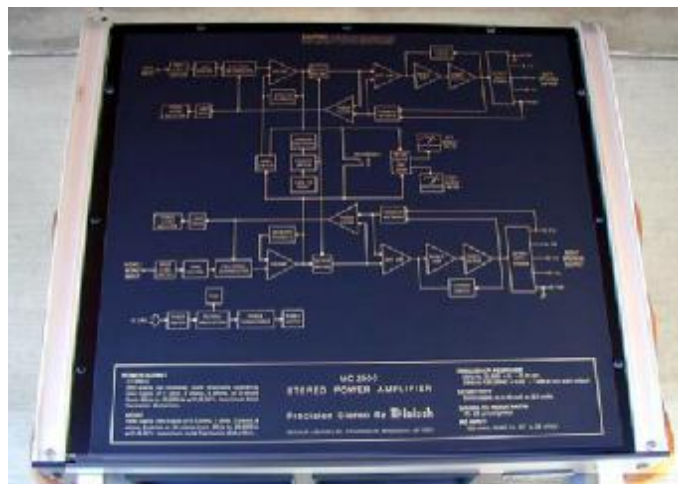

MC 2500 - Sold from October 1980 - 1990. S/N: CS1001~CS????

Size: 19" rack mounting. 10-1/2"H and 17"D. **Weight:** 129 lb. **\$3,800.00**