

MC 252


STEREO POWER AMPLIFIER

McIntosh

The Compendium



FRONT PANEL: Glass with LED/fiber-optic illuminated green/gold nomenclature. Left illuminated **POWER OUTPUT** meter (linear **WATTS** or **DECIBELS**). **LEFT** and **RIGHT POWER GUARD** LEDs. Right illuminated **POWER OUTPUT** meter (linear **WATTS** or **DECIBELS**). ⚡ Remote on indicator. ⚡ **METER** switch: **LIGHTS OFF**, **WATTS** or **HOLD**. **POWER** switch: **OFF**, **REMOTE** or **ON**.

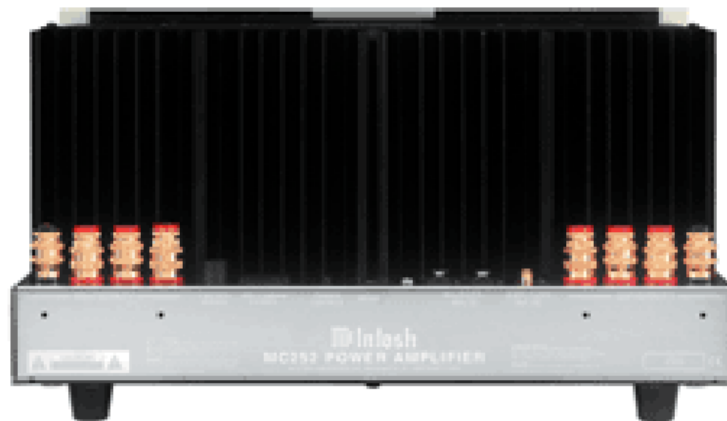

BACK PANEL: Polished stainless steel chassis. **RIGHT** channel **OUTPUT** binding posts for **2 Ω**, **4 Ω** or **8 Ω** speakers. **FUSE**. Power cord receptacle. **POWER CONTROL** jacks: **IN** and **OUT**. **MODE** switch: **STEREO**, **MONO (BRIDGED)** or **MONO (BI-AMP)**. **RIGHT BALANCED** audio **INPUT**. **LEFT BALANCED** audio **INPUT**. **LEFT** and **RIGHT UNBALANCED** audio **INPUTS**. **LEFT** channel **OUTPUT** binding posts for **2 Ω**, **4 Ω** or **8 Ω** speakers.

SPECIFICATIONS: **250w/ch** into 2, 4 or 8 ohms (stereo mode). **500w/ch** into 4, 8 or 16 ohms (mono bridged mode), and **500w/ch** into 1, 2 or 4 ohms (mono parallel mode). **Response:** 20-20kHz (+0 -0.25dB). **Distortion:** 0.005%. **Signal to Noise Ratio:** -112dBa. **Output Impedance:** 2, 4, or 8 ohms (stereo mode) and 1, 2, 4, 8 and 16 ohms (mono modes). **Damping Factor:** greater than 40. **Input Impedance:** 10K unbalanced and 20K balanced. **Input Sensitivity:** 3.2v balanced and 1.6v unbalanced. **Dynamic Headroom:** 2.0 dB. *Sentry Monitor. Autoformers. Power Guard.* **Power Requirements:** 120V at 6.6 Amps.

MC 252

STEREO POWER AMPLIFIER

McIntosh
The Compendium



MC 252 - Sold from 2003 - 2013. S/N: VE1001~VE???? and XA1001~XA????

Size: 9-7/16"H, 17-1/2"W and 14-13/16"D. **Weight:** 94-1/2 lbs. **\$3,800.00**