

MC 352

STEREO POWER AMPLIFIER

McIntosh
The Compendium



FRONT PANEL: Glass with illuminated teal/gold nomenclature. Illuminated **POWER OUTPUT** meters (linear **WATTS** or **DECIBELS**). **LEFT** and **RIGHT POWER GUARD** lights. Remote **ON** indicator. ⚡ **METER** switch: **LIGHTS OFF**, **WATTS** or **HOLD**. **POWER** switch: **OFF**, **REMOTE** or **ON**.




BACK PANEL: **POWER CONTROL** jacks: **OUT** and **IN**. **BALANCED** Right/**MONO** and Left **INPUTS**. **UNBALANCED** Left and Right/**MONO** **INPUTS**. **INPUT MODE** switch: **BALANCED** or **UNBALANCED**. ⚡ Power cord receptacle. **FUSE**. Gold plated **RIGHT** channel **OUTPUT** terminals for 4, or 8 Ω speakers. **OUTPUT MODE** switch: **MONO/PARALLEL** or **STEREO**. **RIGHT** and **LEFT** gold plated speaker **OUTPUT** terminals for 2 Ω . Gold plated **LEFT** channel **OUTPUT** terminals for 4, or 8 Ω speakers.

SPECIFICATIONS: 350w/ch into 2, 4 or 8 ohms. (700w mono). **Response:** 20-20kHz (+0 -0.25dB). **Distortion:** 0.005%. **Signal to Noise Ratio:** 85dBA unbalanced (116dBA below rated output), 115dBA balanced (124dBA below rated output). **Output Impedance:** 2, 4 and 8 ohms. (1, 2, and 4 ohms in mono). **Damping Factor:** 40. **Dynamic Headroom:** 2.1dB. **Input Impedance:** 20k unbalanced, 40k balanced. **Input Sensitivity:** 1.9V unbalanced, 3.8V balanced. Sentry Monitor. Power Guard. Quad Balanced™. Autoformers. Power requirements 120V at 12 Amps. First McIntosh power amplifier with polished stainless steel chassis.

MC 352

STEREO POWER AMPLIFIER

McIntosh
The Compendium

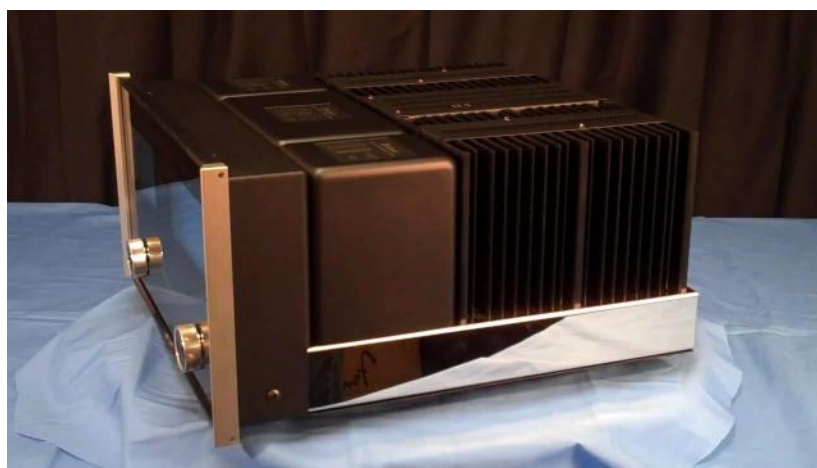

MC 352 - Sold from 1998 - 2004. S/N: RJ1001~RJ????

Size: 8-7/8"H, 17-1/2"W and 21"D. **Weight:** 105 lbs. **\$4,500.00**