

# MC 402

## STEREO POWER AMPLIFIER

McIntosh

The Compendium



**FRONT PANEL:** Glass with LED/fiber-optic illuminated green/gold nomenclature. Illuminated left and right **POWER OUTPUT** meters (linear **WATTS** or **DECIBELS**). Left and right **POWER GUARD** lights. Remote ON indicator light. ⚡ **METER** switch: **LIGHTS OFF**, **WATTS** or **HOLD**. **POWER** switch: **OFF**, **REMOTE** or **ON**.




**BACK PANEL:** **POWER CONTROL** jacks: **OUT** and **IN**. **BALANCED** Right/MONO and Left **INPUTS**. **UNBALANCED** Left and Right/MONO **INPUTS**. **INPUT MODE:** **UNBALANCED** or **BALANCED**. ⚡ Polished stainless steel chassis. Power cord receptacle. **FUSE**. **RIGHT** channel **OUTPUT** binding posts for **2 Ω**, **4 Ω** or **8 Ω** speakers. **LEFT** channel **OUTPUT** binding posts for **2 Ω**, **4 Ω** or **8 Ω** speakers.

**SPECIFICATIONS:** **400w/ch.** (**800w** mono). **Response:** 20-20kHz (+0 -0.25dB). **Distortion:** 0.005%. **Signal to Noise Ratio:** -124dBA balanced, -120dBA unbalanced. **Output Impedance:** 2, 4, or 8 ohms stereo, 1, 2 or 4 ohms mono. **Damping Factor:** >40. **Input Impedance:** 10K balanced and 20K unbalanced. **Input Sensitivity:** 4v balanced and 2.0v unbalanced. **Dynamic Headroom:** 2.1 dB. Sentry Monitor. *Autoformers*. Quad Balanced™. Power Guard. Power requirements 120V at 10 Amps.

# MC 402

STEREO POWER AMPLIFIER

McIntosh  
The Compendium

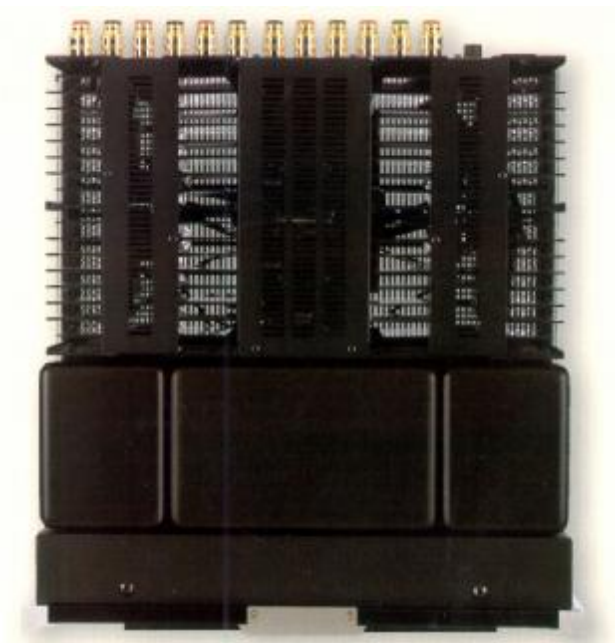

**MC 402** - Sold from 2002 - 2014. S/N: UH1001~UH???? (PRE-ROHAS)  
& XC1001~XC???? (POST-ROHAS [DEC. 2006])

**Size:** 9-7/16"H, 17-1/2"W and 20"D. **Weight:** 110-1/2 lb. **\$5,100.00**