

# MT 5 TURNTABLE


McIntosh  
The Compendium



**FRONT PANEL:** Glass with LED/fiber-optic illuminated green/gold logo and model designation. SPEED select switch: 33, 45, 78. POWER switch: OFF, STANDBY or ON.



**BACK PANEL:** LEFT and RIGHT audio OUTPUTS. GROUND connector. POWER CONTROL: REMOTE IN and REMOTE OUT. SPEED control FINE ADJUSTMENT: 33-1/3RPM, 45RPM and 78RPM. PLATTER LIGHT adjustment. DC IN 12 V connector.

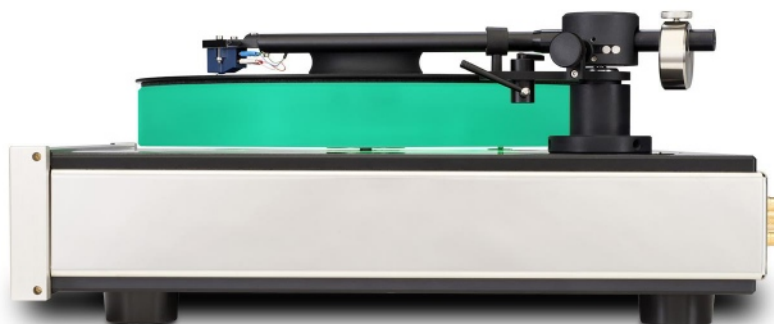

**MT5 TURNTABLE SPECIFICATIONS:** Playback speeds: 33-1/3 rpm, 45 rpm, 78 rpm.  
Motor type: DC Stainless Steel Brushes. Speed Control: Servo System.

# MT 5

## TURNTABLE

**BLUE POINT NO. 2 CARTRIDGE SPECIFICATIONS:** *Cartridge Type:* Moving Coil, High Output. *Output level:* 2.5 mV at 5 cm/s. *Load impedance:* 1000 ohms recommended (Preamp MC input). *Frequency Response:* 20Hz to 50,000Hz. *Channel Separation:* greater than 35dB at 1kHz. *Channel Balance:* less than 0.5 dB at 1KHz. *Tracking Force Range:* 1.6 to 2.0 grams. *Recommended Tracking Force:* 2.0 grams. *Compliance:*  $15 \times 10^{-6}$  cm/dyne. *Total Mass:* 6.3 grams. *Stylus:* Elliptical Diamond. *Cantilever Material:* aluminum.



**MT 5** - Sold from May 2013 - Current. S/N: YJ1001~YJ???? (????? UNITS)

**Size:** 7"H (without dust cover), 17-1/2"W and 19"D. **Weight:** 31.5 lb. **\$6,500.00**