

MR 71

FM STEREO TUNER

McIntosh
The Compendium



FRONT PANEL: Glass and anodized gold aluminum panel. Illuminated tuning dial. Electron ray tube MULTIPATH indicator. Illuminated SIGNAL STRENGTH meter. STEREO MPX light. Illuminated TUNING meter. Tuning control. ⚡ VOLUME control. MODE SELECTOR switch: STEREO AUTO, MONO or POWER OFF. AUTO FREQ CONTROL: MIN to MAX. MUTING switch: IN or OUT. PANLOC buttons.



BACK PANEL: TP2 scope output. MUTING ADJUSTMENT. OUTPUT ADJUSTMENT. LEFT & right AUDIO OUTPUTS: 2.5V fixed and 2.5V FRONT PANEL CONTROLLED. 75 OHM FM ANTENNA input. Screw terminals for 300 OHMS FM ANTENNA. Power cord. FUSE. Unswitched AC outlet. Panloc mounting.



TOP PANEL: PILOT LIGHT INTENSITY: DIM or BRIGHT.

FM SECTION: **Sensitivity:** 2.5uV. **Response:** 20-20kHz within 0.5dB. **Distortion:** less than 0.5%. **Capture Ratio:** 1.5dB. **Image Rejection:** better than 70dB. Five IF stages. Two limiters. **Separation:** 30dB. **SCA Rejection:** 50dB.

TUBES: 6DS4, 12AT7, 6BN4A, 4-6AU6, 6CS6, 6HU6/EM87, 6BN8, 2-6BL8, 6U8, 12AU7. Solid state rectifier.

Power Requirements: 105~125V at 70 Watts.


CABINET: L 11 Also fits L 12, L 52, and L 62

MR 71

FM STEREO TUNER

McIntosh
The Compendium

PANLOC BRACKETS: Right - **043-592** / Left - **043-593**

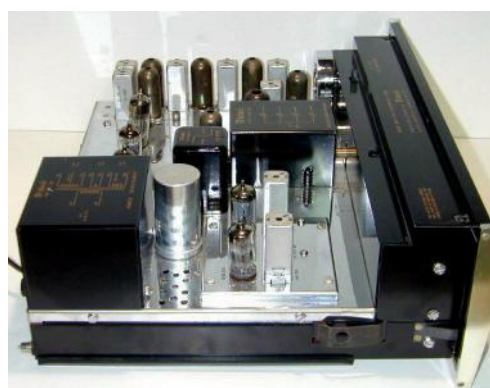

MR 71 - Sold from November 1963 - 1972. S/N: 10B01~99B99 & 1U001~1U217
(9,214 UNITS)

Size: 5-7/16"H, 16"W and 13"D behind panel. **Weight:** 27 lb. **\$399.00**