

MC 1201

MONAURAL POWER AMPLIFIER

McIntosh

The Compendium



FRONT PANEL: Glass with illuminated teal/gold nomenclature. Illuminated POWER OUTPUT meter (linear WATTS or DECIBELS). POWER GUARD light. Remote ON indicator light. ⚡ METER switch: LIGHTS OFF, WATTS or HOLD. POWER switch: OFF, REMOTE or ON. Handles.




BACK PANEL: POWER CONTROL jacks: OUT and IN. BALANCED audio INPUT. UNBALANCED audio INPUT. INPUT MODE switch: UNBALANCED or BALANCED. ⚡ Polished stainless steel chassis. CIRCUIT BREAKER. OUTPUT binding posts for 2 Ω , 4 Ω or 8 Ω speakers. Power cord receptacle.

SPECIFICATIONS: 1200w into 2, 4 or 8 ohms. **Response:** 20-20kHz (+0 -0.25dB). **Distortion:** 0.005%. **Signal to Noise Ratio:** -124dBA balanced, -120dBA unbalanced. **Output Impedance:** 2, 4, or 8 ohms. **Damping Factor:** 100 at 8 ohms. **Input Impedance:** 10K ohms. **Input Sensitivity:** 4.9v balanced and 2.45v unbalanced. **Dynamic Headroom:** 2.1 dB. Sentry Monitor. Power Guard. Autoformers. Quad Balanced™. Power requirements 120V at 15 Amps.

MC 1201

MONAURAL POWER AMPLIFIER

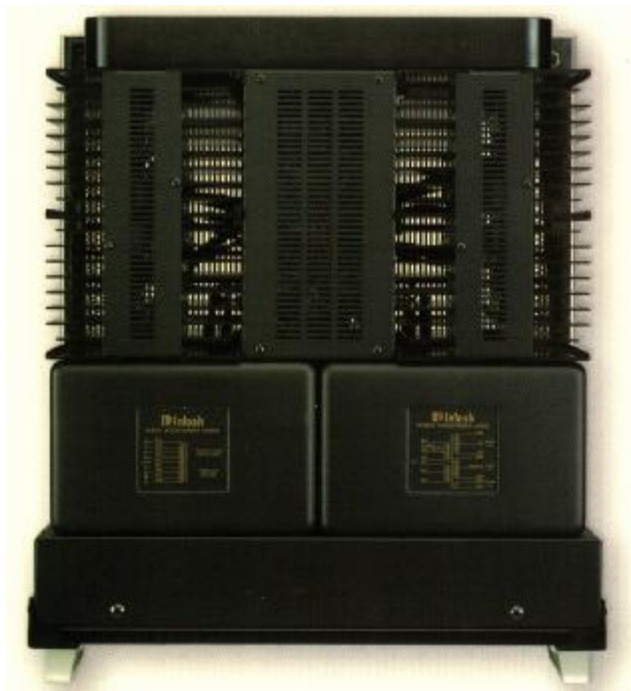

MC 1201 - Sold from 2000 - 2009. S/N: SL1001~SL????

Size: 11"H, 17-3/4"W and 19.63"D. **Weight:** 147 lbs. **\$7,600.00**