

MC 2120

STEREO POWER AMPLIFIER

McIntosh
The Compendium




FRONT PANEL: Gold anodized aluminum and black panel. LEFT and RIGHT output mode lamps: LIMIT or NORMAL. ⚡ LEFT GAIN control. RIGHT/MONO GAIN control. HEADPHONES jack. POWER switch: OFF or ON.



BACK PANEL: LEFT and RIGHT speaker OUTPUT barrier strips. Power cord. AC OUTLET. FUSE. POWER GUARD switch: NORMAL or OUT. MODE switch: STEREO or MONO. Left and Right (MONO) audio INPUT. INPUT LEVEL switch: 2.5v or .75v.

SPECIFICATIONS: 120w/ch. (240w mono). **Response:** 20-20kHz (+0 -0.25dB). **Distortion:** 0.1%. **Noise and Hum:** -95dB. **Output Impedance:** 2, 4, 8 and 16 ohms. (1, 2, 4 and 8 ohms in mono). **Damping Factor:** 14 or greater. **Input Impedance:** 100k. **Input Sensitivity:** 0.75v or 2.5v. **Headphone Impedance:** low. Sentry Monitor. Power Guard. *Autoformers.*

CABINET: L 12 Also fits L 11, L 52, and L 62

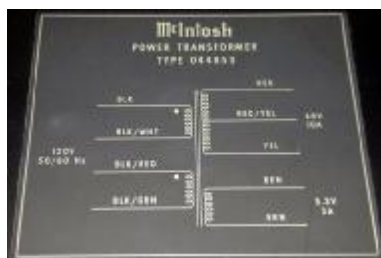

MC 2120

STEREO POWER AMPLIFIER

McIntosh
The Compendium



MC 2120 - Sold from May 1976 - September 1982. S/N: AW1001~AW4100
(3,099 UNITS)

Size: 5-7/16"H, 16"W and 14-1/2"D. **Weight:** 65 lb. **\$999.00**